

बीकानेर नगर निगम

नगर निगम मार्ग, बीकानेर (राजस्थान) फ़ैक्स :- 0151-2226906, फ़ोन :- 0151-2226902, 0151-2226905
E-Mail Address :- nagarnigambikaner@gmail.com, Web Site :- www.bikanermc.org

क्रमांक/निर्माण/2022-23/ 10652-54

दिनांक 21/09/2022

ई- निविदा-सूचना सं0 166/2022-23


नगर निगम बीकानेर की ओर से विभिन्न कार्यों (कुल 01 कार्य) के लिये केन्द्र व राज्य सरकार के अभियांत्रिकी विभागों में "ऐऐ", "ऐ" श्रेणी में पंजीकृत संवेदको एवं नगर निगम में उपर्युक्त श्रेणी में पंजीकृत निविदादाताओं से निर्धारित प्रपत्र में ई-प्रोक्यूमेंट प्रक्रिया से ऑन लाईन निविदाएं आमंत्रित की जाती है। निविदा से सम्बन्धित विवरण वेब साईट **www.bikanermc.org** Web site **www.SPPP. raj.nic.in** से व **http://eproc.rajasthan.gov.in** पर देखा जा सकता है।
निविदा की अनुमानित लागत :- 7.92 लाख

क्रमांक/निर्माण/2022-23/ 10652-54
प्रतिलिपि :-

आयुक्त
नगर निगम, बीकानेर
दिनांक 21/09/2022

1. श्रीमान् निदेशक, जनसम्पर्क एवं प्रकाशन विभाग, राजस्थान संवाद जयपुर को प्रेषित कर लेख है कि उपरोक्त निविदा का प्रकाशन कम से कम स्पेस में राज्य सरकार की प्रकाशन नीति के अनुरूप एक मुख्य क्षेत्रीय दैनिक समाचार पत्र, एक मुख्य राज्य स्तरी दैनिक समाचार पत्र बीकानेर संस्करण में प्रकाशन करावे।

आयुक्त
नगर निगम, बीकानेर

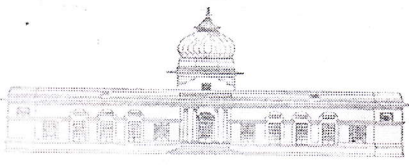

बीकानेर नगर निगम

नगर निगम मार्ग, बीकानेर (राजस्थान) फ़ैक्स :- 0151-2226906, फ़ोन :- 0151-2226902, 0151-2226905
E-Mail Address :- nagarnigambikaner@gmail.com, Web Site :- www.bikanermc.org

क्रमांक/निर्माण/2022-23/ 10652-54

दिनांक 21/09/2022

ई- निविदा-सूचना सं0 166/2022-23

नगर निगम बीकानेर की ओर से निम्नलिखित कार्यों के लिये केन्द्र व राज्य सरकार के अभियांत्रिकी विभागों में "एऐ", "ऐ" श्रेणी में पंजीकृत संवेदको एवं नगर निगम में उपर्युक्त श्रेणी में पंजीकृत निविदादाताओं से निर्धारित प्रपत्र में ई-प्रोक्यूमेंट प्रक्रिया से ऑन लाईन निविदाएं आमंत्रित की जाती है। निविदा से सम्बन्धित विवरण वेबसाईट www.bikanermc.org Website www.SPPP.raj.nic.in से व <http://eproc.rajasthan.gov.in> पर देखा जा सकता है।

निविदा कार्य :	1	नगर निगम भण्डार कार्यालय में कमरा व शौचालय निर्माण कार्य। 7.92 लाख
निविदा की अनुमानित लागत	:	7.92 लाख
ऑनलाईन निविदा फार्म मिलने की तिथि	:	23/09/22 09.30 बजे से 29/09/22 18:00 बजे तक
ऑनलाईन निविदा फार्म जमा कराने की तारीख	:	23/09/22 09.30 बजे से 29/09/22 18:00 बजे तक
ऑनलाईन निविदा खोलने की तिथि	:	30/09/22 को 17.00 बजे

इच्छुक संवेदको को अपने डिजिटल हस्ताक्षर के माध्यम से वेब साईट <http://eproc.rajasthan.gov.in> पर रजिस्टर्ड होना आवश्यक है।

क्रमांक/निर्माण/2022-23/ 10652-54
प्रतिलिपि :-

1. श्रीमान् महापौर महोदया, नगर निगम, बीकानेर।
2. सुरक्षित पत्रावली।


आयुक्त
नगर निगम, बीकानेर
दिनांक 21/09/2022

आयुक्त
नगर निगम, बीकानेर

ई- निविदा-सूचना सं0 166/2022-23

निविदा कार्य :	1	नगर निगम भण्डार कार्यालय में कमरा व शौचालय निर्माण कार्य। 7.92 लाख
निविदा की अनुमानित लागत	:	7.92 लाख
ऑनलाईन निविदा फार्म मिलने की तिथि	:	23/09/22 09.30 बजे से 29/09/22 18:00 बजे तक
ऑनलाईन निविदा फार्म जमा कराने की तारीख	:	23/09/22 09.30 बजे से 29/09/22 18:00 बजे तक
ऑनलाईन निविदा खोलने की तिथि	:	30/09/22 को 17.00 बजे

7
आयुक्त
नगर निगम, बीकानेर

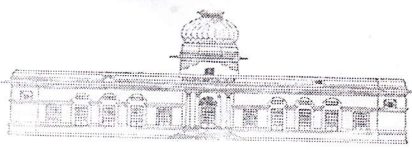

बीकानेर नगर निगम

नगर निगम मार्ग, बीकानेर (राजस्थान) फ़ैक्स :- 0151-2226906, फ़ोन :- 0151-2226902, 0151-2226905
E-Mail Address :- nagarnigambikaner@gmail.com, Web Site :- www.bikanermc.org

क्रमांक / निर्माण / 2022-23 / 10652-54

दिनांक 21/09/2022

ई- निविदा-सूचना सं० 166 / 2022-23

नगर निगम बीकानेर की ओर से निम्नलिखित कार्यों के लिये केन्द्र व राज्य सरकार के अभियांत्रिकी विभागों में "एऐ", "ए" श्रेणी में पंजीकृत संवेदको एवं नगर निगम में उपर्युक्त श्रेणी में पंजीकृत निविदादाताओं से निर्धारित प्रपत्र में ई-प्रोक्यूमेंट प्रक्रिया से ऑन लाईन निविदाएं आमंत्रित की जाती है। निविदा से सम्बन्धित विवरण वेबसाइट www.bikanermc.org Website www.SPPP.raj.nic.in से व <http://eproc.rajasthan.gov.in> पर देखा जा सकता है।

जिला	कार्य/पैकेज का नाम	अनुमानित लागत (लाखों में)	कार्य की अवधि
बीकानेर	नगर निगम भण्डार कार्यालय में कमरा व शौचालय निर्माण कार्य।	7.92	2 माह

निविदा प्रपत्रों को वेब साइट <http://eproc.rajasthan.gov.in> से डाउनलोड किया जा सकता है। इन निविदाओं में भाग लेने वाले संवेदक निविदा को इलेक्ट्रॉनिक फारमेट में वेबसाइट <http://eproc.rajasthan.gov.in> पर अपलोड करावें।

नोट :- स्थानीय निकाय विभाग जयपुर के अन्तर्गत उपर्युक्त श्रेणी में रजिस्टर्ड फर्म एवं नगर निगम बीकानेर संभाग में रजिस्टर्ड "डी" क्लास फर्म 15.00 लाख तक के कार्य एवं "सी" क्लास फर्म 50.00 लाख तक के कार्य एवं "बी" क्लास फर्म 1/2 प्रतिशत धरोहर राशि जमा करवाने पर एवं अन्य विभागों के "एए" अथवा "ए" श्रेणी के संवेदक 2 प्रतिशत धरोहर राशि जमा करवाकर निविदा में भाग ले सकते हैं।


7
आयुक्त
नगर निगम, बीकानेर

निविदा शर्तें

1. स्थानीय निकाय विभाग जयपुर के अन्तर्गत उपर्युक्त श्रेणी में रजिस्टर्ड फर्म एवं नगर निगम बीकानेर संभाग में रजिस्टर्ड "डी" क्लास फर्म 15.00 लाख तक के कार्य एवं "सी" क्लास फर्म 50.00 लाख तक के कार्य एवं "बी" क्लास फर्म 1/2 प्रतिशत धरोहर राशि जमा करवाने पर एवं अन्य विभागों के "एए" अथवा "ए" श्रेणी के संवेदक 2 प्रतिशत धरोहर राशि जमा करवाकर निविदा में भाग ले सकते हैं।
 2. निविदा प्रपत्रों हेतु डाउनलोड की अवधि 23/09/22 09.30 बजे से 23/09/22 18:00 बजे तक होगी।
 3. (अ) निविदा प्रपत्र फॉरमेट में वेबसाइट <http://eproc.rajasthan.gov.in> पर 23/09/22 09.30 बजे से 23/09/22 18:00 बजे तक जमा करवाये जा सकते हैं एवं प्राप्त निविदाएं, इलैक्ट्रॉनिक फॉरमेट में वेबसाइट <http://eproc.rajasthan.gov.in> पर अधिशाषी अभियंता, नगर निगम, बीकानेर निर्माण अनुभाग में 30/09/22 को 17:00 बजे बाद खोली जावेगी।
 4. यदि किसी कारणवश उस दिन अवकाश रहता है तो अगले दिन उसी समय व उसी स्थान पर निविदाएं खोली जायेगी।
(अ) निविदा प्रक्रिया ऑन लाईन होगी।
(ब) इलैक्ट्रॉनिक निविदा प्रक्रिया में प्रीबीड मीटिंग का प्रावधान नहीं है।
 5. अधिशाषी अभियंता, नगर निगम, बीकानेर निर्माण अनुभाग कार्यालय में संवेदक द्वारा 23/09/22 09.30 बजे से 23/09/22 18:00 बजे तक किसी भी कार्य दिवस में निविदा प्रपत्र को देखा जा सकता है। निविदा प्रपत्रों में निविदाकर्ता के लिये योग्यता सूचना तथा निविदाकर्ता की पात्रता, प्लान, स्पेसिफिकेशन, ड्राईंग विभिन्न कार्यों की मात्रा एवं दरों का विवरण, नियम, शर्तें एवं अन्य विवरण वर्णित है।
 6. निविदा खोलने की दिनांक से 90 दिवस तक निविदा स्वीकृति हेतु मान्य रहेगी। यदि निविदाकर्ता उस अवधि में अपनी निविदा अथवा शर्तों में किसी प्रकार का संशोधन करता है अथवा अपनी निविदा वापस ले लेता है तो उसकी धरोहर राशि जब्त कर ली जावेगी।
 7. किसी भी निविदा को स्वीकार करने एवं बिना कारण बताये निरस्त करने के समस्त अधिकार सक्षम अधिकारी के पास सुरक्षित है आरपीडब्ल्यू ए-100 की समस्त शर्तें मान्य होगी।
 8. 10 लाख या अधिक लागत के कार्यों की Defect Liability Period 05 वर्ष का होगा।
 9. RTPP एक्ट 2012, नियम 2013 के समस्त प्रावधान लागू होंगे। RTPP 2013 के नियम 75A के अनुसार कार्य में दर 15 प्रतिशत से अधिक नीची आने पर बिड की 85 प्रतिशत राशि में से भरी गई बिड के अन्तर राशि का 50 प्रतिशत की राशि अतिरिक्त पी0जी0 के रूप में अनुबंध से पूर्व जमा कराना आवश्यक होगा।
 10. निविदा शुल्क निम्नानुसार निर्धारित है :-
- | कार्य की अनुमानित राशि (लाखों में) | शुल्क |
|------------------------------------|----------------------------|
| नाम | आयुक्त, नगर निगम, बीकानेर। |
| 10 लाख तक | 500 / - |
| 10 लाख से अधिक | 1000 / - |
11. प्रासेसिंग फीस निम्नानुसार निर्धारित है :-
- | कार्य की अनुमानित राशि (लाखों में) | शुल्क |
|------------------------------------|---------------------------------|
| नाम | Managing Director, RISL, Jaipur |
| 50 लाख तक | 500 / - |
| 50 लाख से अधिक | 1000 / - |
12. निविदा शुल्क, प्रासेसिंग फीस एवं धरोहर राशि के भुगतान की प्रक्रिया ऑनलाईन ही होगी।
 13. निविदा हेतु ऑनलाईन भुगतान नगर निगम की वेबसाइट www.bikanermc.org पर PAY ONLINE ऑप्शन पर होगा।

14. ऑनलाईन भुगतान हेतु संवेदक को नगर निगम की वेबसाईट www.bikanermc.org पर **PAY ONLINE** पर भुगतान किये जाने के पश्चात् भुगतान रसीद, फर्म के रजिस्ट्रेशन की प्रति एवं फर्म का जी0एस0टी0 प्रमाण पत्र को ऑनलाईन साईट <http://eproc.rajasthan.gov.in> पर अपलोड करना अनिवार्य होगा।
15. निविदादाता द्वारा निविदा दस्तावेज मय कार्य का "G" Schdule की प्रति को हस्ताक्षर मय नाम, तकनीकी निविदा के साथ अपलोड किया जाना अनिवार्य है अन्यथा हस्ताक्षरित निविदा दस्तावेज के अभाव में निविदा पर विचार नहीं किया जावेगा।
16. ऑनलाईन पेमेंट भुगतान के अतिरिक्त किसी अन्य तरीके के भुगतान करने वाली निविदा पर विचार नहीं किया जावेगा।
17. निविदा शुल्क, प्रोसेसिंग शुल्क Non Refundable होगा।
18. निर्धारित शुल्क से कम भुगतान करने वाली निविदा पर विचार नहीं किया जावेगा।
19. किसी टंकणीय त्रुटि के कारण कार्ड के जी अनुसूची की विभिन्न इकाई की दरे सम्बंधित एस0ओ0आर0/बी0एस0आर0 की दरें मानी जावेगी।
20. निविदा प्रपत्र 02 कवर में होगा। यदि संवेदक द्वारा निविदा प्रपत्र अनुसार निविदा अपलोड करते समय वांछित प्रपत्र संलग्न नहीं किये जाते हैं तो उस निविदा पर विचार नहीं किया जावेगा।
21. निविदादाता को श्रम नियमों का पालन करना होगा। श्रमिकों के बीमा (इश्योरेन्स) एवं पी0एफ0 जमा आदि करवाने की जिम्मेवारी सफल निविदादाता की होगी। ई0पी0एफ0 एवं ईएसआई जमा राशि के चालान श्रमिकों के नाम सहित प्रस्तुत करने पर ही रनिंग व अंतिम बिल का भुगतान किया जावेगा।
22. ई- टेन्डरिंग के लिये निविदादाता हेतु निर्देश :-
 अ - इन निविदाओं में इच्छुक निविदादाता निविदा प्रपत्रों का इन्टरनेट साईट <http://eproc.rajasthan.gov.in> से डाउनलोड कर सकते हैं।
 ब - निविदाओं में भाग लेने वाले निविदादाताओं को इन्टरनेट साईट <http://eproc.rajasthan.gov.in> पर रजिस्टर करवाना होगा। ऑनलाईन निविदा में भाग लेने के लिये डिजिटल सर्टिफिकेट टेक्नोलॉजी एक्ट 2000 के तहत प्राप्त करना होगा जो इलेक्ट्रॉनिक निविदा में साईन करने हेतु काम आयेगा। निविदादाता उपरोक्त डिजिटल सर्टिफिकेट सी सी ए द्वारा स्वीकृत ऐजेन्सी से प्राप्त कर सकते हैं। जिन निविदादाताओं के पास पूर्व में वैध डिजिटल सर्टिफिकेट है, नया डिजिटल सर्टिफिकेट लेने की आवश्यकता नहीं है।
 स- निविदादाताओं को निविदा प्रपत्र इलेक्ट्रॉनिक फॉर्मेट में उपरोक्त वेबसाईट पर डिजिटल साईन के साथ प्रस्तुत करना होगा। जिसके प्रस्ताव डिजिटल साईन के साथ नहीं होंगे, उनके प्रस्ताव स्वीकार नहीं किये जायेंगे। कोई भी प्रस्ताव अकेले भौतिक फर्म में स्वीकार्य नहीं होगा।
 द- ऑन लाईन निविदाएं निर्धारित दिनांक एवं समय पर उपरोक्त क्रम संख्या - 3 के अनुसार खोली जायेगी।
 य - इलेक्ट्रॉनिक निविदा प्रपत्रों को जमा कराने से पूर्व निविदादाता यह सुनिश्चित कर लेवे कि निविदा प्रपत्रों से संबंधित सभी आवश्यक दस्तावेजों की स्केन कॉपी निविदा प्रपत्रों के साथ अटैच कर दी गयी है।
 र - कोई भी टेंडर इलेक्ट्रॉनिक जमा कराने में किसी कारण विलम्ब हो जाता है तो उसका जिम्मेदार विभाग नहीं होगा।
 ल - टेंडर के प्रपत्रों में आवश्यक सभी सूचियों को सम्पूर्ण रूप से भरकर ऑनलाईन दर्ज करें।


 आयुक्त
 नगर निगम, बीकानेर



Municipal Corporation , Bikaner.

Name of Work :- नगर निगम भण्डार कार्यालय में कमरा व शौचालय निर्माण कार्य।

Name of Contractor :-

Date of Sales : As per NIT	Date of Opening : As per NIT
Tender Cost Rs 792000/-	Earnest Money Rs. 2% or 1/2%
Earnest Money Cheque Draft No. :	Date :
Earnest Money M.C.B. Receipt No. :	Date :
Earnest Fees M.C.B. Receipt No. :	Date :

"G" Schdule

S _n No.	BSR Code	Item	Qty.	Unit	Rate	Amount
1.	SOR 2017 3.1.1	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge. In cement Mortar.	8.50	Cum	284.00	2414.00
2.	4.5	Construction of embankment with approved materials deposited at site available from roadway cutting and excavation from drain and foundation of other structures, graded and compacting by vibratory roller 8-10 tonne to meet requirement of table 300-2 as per MoRT&H specification clause 305.	50.00	Cum	64.00	3200.00
3.	4.10 4.10.1.1	Earth work in excavation in foundation, trenches etc. including dressing of sides and ramming of bottoms, including getting out the excavated material, refilling after laying pipe/ foundation and disposal of surplus excavated material at a lead upto 50m suitable site as per direction of Engineer for following depths, elow natural ground / Road top level. In all types soils/ saturated soil such as moorum, sand, sandy silt, clay, black cotton soil, kankar, etc. Depth upto 1.5 m.	24.06	Cum	164.00	3945.84
4.	21.1.7	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering - All work upto plinth level : 1:4:8 (1 Cement : 4 fine/ coarse sand : 8 graded stone aggregate 40 mm nominal size)	13.00	Cum	3360.00	43680.00
5.	24.1.2	Brick work with FPS bricks of class designation 75 in foundation and plinth in: Cement mortar 1:6 (1 cement : 6 coarse sand).	20.00	Cum	3760.00	75200.00
6.	21.1 21.1.2	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering - All work upto plinth level : 1:1.5:3 (1 Cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size).	5.00	Cum	4700.00	23500.00
7.	22.1.3	Centring and shuttering with plywood or steel sheet upto two stories or height upto 7.5 metre above plinth level including strutting, propping etc. and removal of form for : Suspended floors, roofs, landings, balconies and access platform.	89.66	Sqm	287.00	25732.42
8.	5.1	Brick work with F.P.S. bricks of class designation 75 in superstructure above plinth level upto floor V level in all shapes and sizes in Cement Mortar 1:6 (1 Cement : 6 coarse sand). Eaxtra over item of brick work for doing brick work with class designation 100 instead of class designation 75. Quantity in Cum.	25.00	Cum	4300.00	107500.00
9.	23.3 23.3.2	Reinforced cement concrete work in beams, suspended floors, roofs having slope upto 15° landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases upto two stories excluding the cost of centring, shuttering, finishing and reinforcement: M-20 Grade Concrete (1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size) -As per design mix).	15.00	Cum	5530.00	82950.00
10.	23.19 23.19.6	Reinforcement for R.C.C. work at all levels including straightening, cutting, bending, placing in position and binding all complete. Thermo-Mechanically Treated bars.	1800.00	Kg.	51.50	92700.00

11.	38.14.1	Grading roof for water proofing treatment with Cement concrete 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	6.81	Cum	4370.00	29759.70
12.	30.16.4	Precast terrazo tiles 22mm thick with graded marble chips of size upto 12mm laid in floors, and landings, jointed with neat cement slurry mixed with pigment to match the shade of the tiles including rubbing and polishing complete with precast tiles on 20mm thick bed of cement mortar 1:4 (1 cement : 4 coarse sand) : Ordinary cement without any pigment.	68.06	Sqm	642.00	43694.52
13.	30.24.1	Kota stone slab flooring 25mm thick over 20 mm (average) thick base laid over and jointed with grey cement slurry mixed with pigment to match the shade of the slab including rubbing and polishing complete with base of cement mortar 1 : 4 (1 cement : 4 coarse sand) : Area of each slab 900 to 2000 sqcm.	68.06	Sqm	1020.00	69421.20
14.	32.3.3	Cement plastering including T&P, scaffolding, material and complete labpour, including cost of water, curing, racking of joints etc. with 20 mm cement plaster of mix : 1:6 (1 cement : 6 fine/coarse sand)	166.40	Sqm	192.00	31948.80
15.	27.12	Providing and fixing 1st quality MAT finished ceramic tile size 300x300mm confirming to IS : 13755 and IS : 15622 colour such as white, grey, ivory, fume red brown, light green, light blue and other light shades in floors, steps, pillars etc. laid on a bed of neat cement slurry finished with flush pointing in the white cement mixed with pigment to match the shade of the tile complete (including the cost of cement mortar bed 1:4).	10.20	Sqm	660.00	6732.00
16.	27.11	Providing and fixing 1st quality standard white, grey, ivory, fume red brown, light green, light blue and other light shades glazed tiles confirming to IS : 13753 & IS : 15622 of size 200mm x 300mm in walls, floors, steps, pillars etc. laid on a bed of neat cement slurry finished with flush pointing in the white cement mixed with pigment to match the shade of the tile complete (excluding the cost of cement plaster on walls and pillar).	26.16	Sqm	679.00	17762.64
17.	28.24.2.3	Providing and fixing external grade board solid core single leaf flush door shutters ISI 2202-67 marked using Phenol formal dehyderesin in glue both sides including approved ISI marked Stainless Steel butt hinges fittings with necessary screws complete as per annexure 'A' 30 mm thick Decorative teak veneer both side	10.00	Sqm	2440.00	24400.00
18.	29.12	Providing and fixing factory made ISI marked steel glazed doors, windows and ventilators side /top /centre hung with beading and all members such as F7D, F4B, K11 B and K12 B etc. complete of standard rolled steel sections, joints mitred and flash butt welded and sash bars tenoned and rivetted with 15x3mm lugs, 10cm long, embedded in cement concrete blocks 15x10x10cm of 1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20mm nominal size) or with wooden plugs and screws or rawl plugs and screws or with fixing clips or with bolts and nuts as required, including providing and fixing of hinges, pivots, float glass panes with glazing clips and special metal sash putty of approved make and a priming coat of approved steel primer excluding the cost of metal beading and other fittings except necessary hinges or pivots complete as per approved design.	2.16	Sqm	3040.00	6566.40
19.	29.26 29.26.2	Steel work welded in built up sections/ framed work including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works.	200.00	Kg.	87.50	17500.00
20.	S-2 2.35	P/F PVC Storage Tank (IS:12701 Marked indicating the BIS license No), of approved quality make with cover, 25 mm dia 1 M long G.I. flow pipe & 25 cm. long wash out pipe with plug & socket, including placing on terrance (at all floors) making connection etc. complete of approved design.	1000.00	Litre	6.60	6600.00

21.	34.7.2	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply including all CPVC plain & brass threaded fittings i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and testing of joints complete as per direction of Engineer in Charge. Internal work - Exposed on wall. 20 mm nominal outer dia Pipes.	30.00	Mtr	226.00	6780.00
22.	34.7.3	25 mm nominal outer dia Pipes.	15.00	Mtr.	288.00	4320.00
23.	31.41	Providing and fixing on wall face Unplasticised Rigid PVC Single socketed pipes rain water pipes conforming to IS : 13592 Type A including jointing with seal ring conforming to IS : 5382 leaving 10 mm gap for thermal expansion. 75 mm diameter	20.00	Mtr.	155.00	3100.00
24.	34.15.1	Providing and fixing brass bib cock of approved quality : 15 mm nominal bore	5.00	Each	215.00	1075.00
25.	36.1.1	Providing and fixing water closet squatting pan (Indian type W.C. pan) with 100mm sand cast Iron P or S trap, 10 litre low level white P.V.C. flushing cistern with manually controlled device (handle lever) conforming to IS : 7231, with all fittings and fixtures complete including cutting and making good the walls and floors wherever required : White Vitreous china Orissa pattern W.C. pan of size 580x440mm with integral type foot rests.	3.00	Each	3570.00	10710.00
26.	36.7.1	White Vitreous China Wash basin size 630x450 mm with a pair of 15 mm C.P. brass pillar taps.	2.00	Each	2050.00	4100.00
27.	36.24	Providing and fixing white vitreous china squatting plate urinal with integral rim longitudinal flush pipe.	3.00	Nos.	1930.00	5790.00
28.	41.1.1	Wiring of light point / fan point / exhaust fan point / call bell point with 1.5 sq. mm FR PVC insulated unsheathed 1.1kV grade flexible copper conductor and 1.5 sq.mm FR PVC insulated copper earth conductor (IS:694) of approved make in double lock/ ISI marked single lock pvc casing capping & it's accessories, 18 SWG M.S. box with earth terminal, screwless cage connectors for neutral looping in switch board & false ceiling point, 6 A switch 3.0 mm thick phenolic laminated sheet, zinc plated / brass screws, cup washers , making connections, testing etc. as required. Short point (up to 3 mtr.)	10.00	Per Point	230.00	2300.00
29.	41.1.2	Medium point (up to 6 mtr.)	10.00	Per Point	322.00	3220.00
30.	32.30.1	Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade New work (two or more coats) over and including priming coat with cement primer.	166.40	Sqm	86.00	14310.40
31.	32.15	Providing and applying plaster of paris putty of 2 mm thickness over plastered surface to prepare the surface even and smooth complete	170.00	Sqm	126.00	21420.00
Grand Total						792332.92
SAY :-						7.92 Lacs

I/We Tendering above work @ above/below "G" Schedule.

Signature of Tendering Contractor