

बीकानेर नगर निगम

नगर निगम मार्ग, बीकानेर (राजस्थान) फ़ैक्स :- 0151-2226906, फ़ोन :- 0151-2226902, 0151-2226905
E-Mail Address :- nagarnigambikaner@gmail.com, Web Site :- www.bikanermc.org

क्रमांक/निर्माण/2022-23/ 9890-9892

दिनांक 17/05/2022

ई- निविदा-सूचना सं0 23/2022-23


नगर निगम बीकानेर की ओर से विभिन्न कार्यों (कुल 03 कार्य) के लिये केन्द्र व राज्य सरकार के अभियांत्रिकी विभागों में "एऐ", "ऐ" श्रेणी में पंजीकृत संवेदको एवं नगर निगम में उपर्युक्त श्रेणी में पंजीकृत निविदादाताओं से निर्धारित प्रपत्र में ई-प्रोक्यूरमेंट प्रक्रिया से ऑन लाईन निविदाएं आमंत्रित की जाती है। निविदा से सम्बन्धित विवरण वेब साईट **www.bikanermc.org** Web site **www.SPPP.raj.nic.in** से व **http://eproc.rajasthan.gov.in** पर देखा जा सकता है।
निविदा की अनुमानित लागत :-29.77 लाख

क्रमांक/निर्माण/2022-23/ 9890-92
प्रतिलिपि :-

9
आयुक्त
नगर निगम, बीकानेर
दिनांक 17/05/2022

1. श्रीमान् निदेशक, जनसम्पर्क एवं प्रकाशन विभाग, राजस्थान संवाद जयपुर को प्रेषित कर लेख है कि उपरोक्त निविदा का प्रकाशन कम से कम स्पेस में राज्य सरकार की प्रकाशन नीति के अनुरूप एक मुख्य क्षेत्रीय दैनिक समाचार पत्र, एक मुख्य राज्य स्तरी दैनिक समाचार पत्र में प्रकाशन करावें।

9
आयुक्त
नगर निगम, बीकानेर

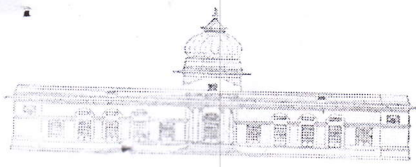

बीकानेर नगर निगम

नगर निगम मार्ग, बीकानेर (राजस्थान) फ़ैक्स :- 0151-2226906, फ़ोन :- 0151-2226902, 0151-2226905
E-Mail Address :- nagarnigambikaner@gmail.com, Web Site :- www.bikanermc.org

क्रमांक/निर्माण/2022-23/

दिनांक

ई- निविदा-सूचना सं० 23/2022-23

नगर निगम बीकानेर की ओर से निम्नलिखित कार्यों के लिये केन्द्र व राज्य सरकार के अभियांत्रिकी विभागों में "एए", "ए" श्रेणी में पंजीकृत संवेदको एवं नगर निगम में उपर्युक्त श्रेणी में पंजीकृत निविदादाताओं से निर्धारित प्रपत्र में ई-प्रोक्यूमेंट प्रक्रिया से ऑन लाईन निविदाएं आमंत्रित की जाती है। निविदा से सम्बन्धित विवरण वेबसाईट www.bikanermc.org Website www.SPPP.raaj.nic.in से व <http://eproc.rajasthan.gov.in> पर देखा जा सकता है।

निविदा कार्य :	1	बंगला नगर में आचार्य श्मशान भूमि में विकास कार्य।	7.06 लाख
	2	बंगला नगर में कुमावत समाज श्मशान भूमि में विकास कार्य।	8.30 लाख
	3	राजपूत श्मशान भूमि, बंगला नगर में निर्माण एवं विकास कार्य।	14.41 लाख
निविदा की अनुमानित लागत	:	29.77 लाख	
ऑनलाईन निविदा फार्म मिलने की तिथि	:	20/05/22 09.30 बजे से 30/05/22 18:00 बजे तक	
ऑनलाईन निविदा फार्म जमा कराने की तारीख	:	20/05/22 09.30 बजे से 30/05/22 18:00 बजे तक	
ऑनलाईन निविदा खोलने की तिथि	:	31/05/22 को 17.00 बजे	

इच्छुक संवेदको को अपने डिजिटल हस्ताक्षर के माध्यम से वेब साईट <http://eproc.rajasthan.gov.in> पर रजिस्टर्ड होना आवश्यक है।

क्रमांक/निर्माण/2022-23/ 9890-9892
प्रतिलिपि :-

1. श्रीमान् महापौर महोदया, नगर निगम, बीकानेर।
2. सुरक्षित पत्रावली।


आयुक्त
नगर निगम, बीकानेर
दिनांक 17/05/22

आयुक्त
नगर निगम, बीकानेर

ई- निविदा-सूचना सं0 23/2022-23

निविदा कार्य :	1	बंगला नगर में आचार्य श्मशान भूमि में विकास कार्य।	7.06 लाख
	2	बंगला नगर में वामावत समाज श्मशान भूमि में विकास कार्य।	8.30 लाख
	3	राजपूत श्मशान भूमि, बंगला नगर में निर्माण एवं विकास कार्य।	14.41 लाख
निविदा की अनुमानित लागत	:	29.77 लाख	
ऑनलाईन निविदा फार्म मिलने की तिथि	:	20/05/22 09.30 बजे से 30/05/22 18:00 बजे तक	
ऑनलाईन निविदा फार्म जमा कराने की तारीख	:	20/05/22 09.30 बजे से 30/05/22 18:00 बजे तक	
ऑनलाईन निविदा खोलने की तिथि	:	31/05/2022 को 17.00 बजे	

7
आशुक्त
नगर निगम, बीकानेर

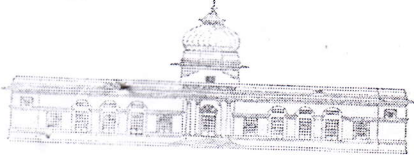

(वेबसाईट पर अपलोड हेतु)

बीकानेर नगर निगम

नगर निगम मार्ग, बीकानेर (राजस्थान) फ़ैक्स :- 0151-2226906, फ़ोन :- 0151-2226902, 0151-2226905
E-Mail Address :- nagarnigambikaner@gmail.com, Web Site :- www.bikanermc.org

क्रमांक/निर्माण/2022-23/ 9890-92

दिनांक 17/07/22

ई- निविदा-सूचना सं० 23/2022-23

नगर निगम बीकानेर की ओर से निम्नलिखित कार्यों के लिये केन्द्र व राज्य सरकार के अभियांत्रिकी विभागों में "एए", "ए" श्रेणी में पंजीकृत संवेदको एवं नगर निगम में उपर्युक्त श्रेणी में पंजीकृत निविदादाताओं से निर्धारित प्रपत्र में ई-प्रोक्यूमेंट प्रक्रिया से ऑन लाईन निविदाएं आमंत्रित की जाती है। निविदा से सम्बन्धित विवरण वेबसाईट www.bikanermc.org Website www.SPPP.raj.nic.in से व <http://eproc.rajasthan.gov.in> पर देखा जा सकता है।

जिला	कार्य/पैकेज का नाम	अनुमानित लागत (लाखों में)	कार्य की अवधि
बीकानेर	बंगला नगर में आचार्य श्मशान भूमि में विकास कार्य।	7.06	2 माह
	बंगला नगर में कुमावत समाज श्मशान भूमि में विकास कार्य।	8.30	2 माह
	राजपूत श्मशान भूमि, बंगला नगर में निर्माण एवं विकास कार्य।	14.41	3 माह

निविदा प्रपत्रों को वेब साईट <http://eproc.rajasthan.gov.in> से डाउनलोड किया जा सकता है। इन निविदाओं में भाग लेने वाले संवेदक निविदा को इलेक्ट्रॉनिक फारमेट में वेबसाईट <http://eproc.rajasthan.gov.in> पर अपलोड करावें।

नोट :- स्थानीय निकाय विभाग जयपुर के अन्तर्गत उपर्युक्त श्रेणी में रजिस्टर्ड फर्म एवं नगर निगम बीकानेर संभाग में रजिस्टर्ड "डी" क्लास फर्म 15.00 लाख तक के कार्य एवं "सी" क्लास फर्म 50.00 लाख तक के कार्य एवं "बी" क्लास फर्म 1/2 प्रतिशत धरोहर राशि जमा करवाने पर एवं अन्य विभागों के "एए" अथवा "ए" श्रेणी के संवेदक 2 प्रतिशत धरोहर राशि जमा करवाकर निविदा में भाग ले सकते हैं।

आशुक्त
नगर निगम, बीकानेर

निविदा शर्तें

1. स्थानीय निकाय विभाग जयपुर के अन्तर्गत उपर्युक्त श्रेणी में रजिस्टर्ड फर्म एवं नगर निगम बीकानेर संभाग में रजिस्टर्ड "डी" क्लास फर्म 15.00 लाख तक के कार्य एवं "सी" क्लास फर्म 50.00 लाख तक के कार्य एवं "बी" क्लास फर्म 1/2 प्रतिशत धरोहर राशि जमा करवाने पर एवं अन्य विभागों के "एए" अथवा "ए" श्रेणी के संवेदक 2 प्रतिशत धरोहर राशि जमा करवाकर निविदा में भाग ले सकते हैं।
2. निविदा प्रपत्रों हेतु डाउनलोड की अवधि 20/05/22 09.30 बजे से 30/05/22 18:00 बजे तक होगी।
3. (अ) निविदा प्रपत्र फॉरमेट में वेबसाइट <http://eproc.rajasthan.gov.in> पर 20/05/22 09.30 बजे से 30/05/22 18:00 बजे तक जमा करवाये जा सकते हैं एवं प्राप्त निविदाएं, इलैक्ट्रॉनिक फॉरमेट में वेबसाइट <http://eproc.rajasthan.gov.in> पर अधिशाषी अभियंता, नगर निगम, बीकानेर निर्माण अनुभाग में 31/05/22 को 17:00 बजे बाद खोली जावेगी।
4. यदि किसी कारणवश उस दिन अवकाश रहता है तो अगले दिन उसी समय व उसी स्थान पर निविदाएं खोली जायेगी।
(अ) निविदा प्रक्रिया ऑन लाईन होगी।
(ब) इलैक्ट्रॉनिक निविदा प्रक्रिया में प्रीबीड मीटिंग का प्रावधान नहीं है।
5. अधिशाषी अभियंता, नगर निगम, बीकानेर निर्माण अनुभाग कार्यालय में संवेदक द्वारा 20/05/22 09.30 बजे से 30/05/2022 18:00 बजे तक किसी भी कार्य दिवस में निविदा प्रपत्र को देखा जा सकता है। निविदा प्रपत्रों में निविदाकर्ता के लिये योग्यता सूचना तथा निविदाकर्ता की पात्रता, प्लान, स्पेसिफिकेशन, ड्राईंग विभिन्न कार्यों की मात्रा एवं दरों का विवरण, नियम, शर्तें एवं अन्य विवरण वर्णित है।
6. निविदा खोलने की दिनांक से 90 दिवस तक निविदा स्वीकृति हेतु मान्य रहेगी। यदि निविदाकर्ता उस अवधि में अपनी निविदा अथवा शर्तों में किसी प्रकार का संशोधन करता है अथवा अपनी निविदा वापस ले लेता है तो उसकी धरोहर राशि जब्त कर ली जावेगी।
7. किसी भी निविदा को स्वीकार करने एवं बिना कारण बताये निरस्त करने के समस्त अधिकार सक्षम अधिकारी के पास सुरक्षित है आरपीडब्ल्यू ए-100 की समस्त शर्तें मान्य होगी।
8. 10 लाख या अधिक लागत के कार्यों की Defect Liability Period 05 वर्ष का होगा।
9. RTPP एक्ट 2012, नियम 2013 के समस्त प्रावधान लागू होंगे। RTPP 2013 के नियम 75A के अनुसार कार्य में दर 15 प्रतिशत से अधिक नीची आने पर बिड की 85 प्रतिशत राशि में से भरी गई बिड के अन्तर राशि का 50 प्रतिशत की राशि अतिरिक्त पी0जी0 के रूप में अनुबंध से पूर्व जमा कराना आवश्यक होगा।
10. निविदा शुल्क निम्नानुसार निर्धारित है :-

कार्य की अनुमानित राशि (लाखों में)	शुल्क
नाम	आयुक्त, नगर निगम, बीकानेर।
10 लाख तक	500 / -
10 लाख से अधिक	1000 / -


11. प्रासेसिंग फीस निम्नानुसार निर्धारित है :-

कार्य की अनुमानित राशि (लाखों में)	शुल्क
नाम	Managing Director, RISL, Jaipur
50 लाख तक	500 / -
50 लाख से अधिक	1000 / -

12. निविदा शुल्क, प्रासेसिंग फीस एवं धरोहर राशि के भुगतान की प्रक्रिया ऑनलाईन ही होगी।
13. निविदा हेतु ऑनलाईन भुगतान नगर निगम की वेबसाइट www.bikanermc.org पर PAY ONLINE ऑप्शन पर होगा।

9

14. ऑनलाईन भुगतान हेतु संवेदक को नगर निगम की वेबसाईट www.bikanermc.org पर **PAY ONLINE** पर भुगतान किये जाने के पश्चात् भुगतान रसीद, फर्म के रजिस्ट्रेशन की प्रति एवं फर्म का जी0एस0टी0 प्रमाण पत्र को ऑनलाईन साईट <http://eproc.rajasthan.gov.in> पर अपलोड करना अनिवार्य होगा।
15. निविदादाता द्वारा निविदा दस्तावेज मय कार्य का "G" Schdule की प्रति को हस्ताक्षर मय नाम, तकनीकी निविदा के साथ अपलोड किया जाना अनिवार्य है अन्यथा हस्ताक्षरित निविदा दस्तावेज के अभाव में निविदा पर विचार नहीं किया जावेगा।
16. ऑनलाईन पेमेंट भुगतान के अतिरिक्त किसी अन्य तरीके के भुगतान करने वाली निविदा पर विचार नहीं किया जावेगा।
17. निविदा शुल्क, प्रोसेसिंग शुल्क Non Refundable होगा।
18. निर्धारित शुल्क से कम भुगतान करने वाली निविदा पर विचार नहीं किया जावेगा।
19. किसी टंकणीय त्रुटि के कारण कार्ड के जी अनुसूची की विभिन्न इकाई की दरे सम्बंधित एस0ओ0आर0/बी0एस0आर0 की दरे मानी जावेगी।
20. निविदा प्रपत्र 02 कवर में होगा। यदि संवेदक द्वारा निविदा प्रपत्र अनुसार निविदा अपलोड करते समय वांछित प्रपत्र संलग्न नहीं किये जाते हैं तो उस निविदा पर विचार नहीं किया जावेगा।
21. ई- टेन्डरिंग के लिये निविदादाता हेतु निर्देश :-
- अ - इन निविदाओं में इच्छुक निविदादाता निविदा प्रपत्रों का इन्टरनेट साईट <http://eproc.rajasthan.gov.in> से डाउनलोड कर सकते हैं।
- ब - निविदाओं में भाग लेने वाले निविदादाताओं को इन्टरनेट साईट <http://eproc.rajasthan.gov.in> पर रजिस्टर करवाना होगा। ऑनलाईन निविदा में भाग लेने के लिये डिजिटल सर्टिफिकेट टेक्नोलॉजी एक्ट 2000 के तहत प्राप्त करना होगा जो इलेक्ट्रॉनिक निविदा में साईन करने हेतु काम आयेगा। निविदादाता उपरोक्त डिजिटल सर्टिफिकेट सी सी ए द्वारा स्वीकृत एजेन्सी से प्राप्त कर सकते हैं। जिन निविदादाताओं के पास पूर्व में वैध डिजिटल सर्टिफिकेट है, नया डिजिटल सर्टिफिकेट लेने की आवश्यकता नहीं है।
- स- निविदादाताओं को निविदा प्रपत्र इलेक्ट्रॉनिक फॉर्मेट में उपरोक्त वेबसाईट पर डिजिटल साईन के साथ प्रस्तुत करना होगा। जिसके प्रस्ताव डिजिटल साईन के साथ नहीं होंगे, उनके प्रस्ताव स्वीकार नहीं किये जायेंगे। कोई भी प्रस्ताव अकेले भौतिक फर्म में स्वीकार्य नहीं होगा।
- द- ऑन लाईन निविदाएं निर्धारित दिनांक एवं समय पर उपरोक्त क्रम संख्या - 3 के अनुसार खोली जायेगी।
- य - इलेक्ट्रॉनिक निविदा प्रपत्रों को जमा कराने से पूर्व निविदादाता यह सुनिश्चित कर लेवे कि निविदा प्रपत्रों से संबंधित सभी आवश्यक दस्तावेजों की स्कैन कॉपी निविदा प्रपत्रों के साथ अटैच कर दी गयी है।
- र - कोई भी टेंडर इलेक्ट्रॉनिक जमा कराने में किसी कारण विलम्ब हो जाता है तो उसका जिम्मेदार विभाग नहीं होगा।
- ल - टेंडर के प्रपत्रों में आवश्यक सभी सूचियों को सम्पूर्ण रूप से भरकर ऑनलाईन दर्ज करें।


आयुक्त
नगर निगम, बीकानेर



Municipal Corporation , Bikaner.

Name of Work :- बंगला नगर में आचार्य समाज श्मशान भूमि में विकास कार्य।

Name of Contractor :-

Date of Sales : 20.05.2022 to 30.05.2022		Date of Opening : 31.05.2022	
Tender Cost Rs 706000/-		Earnest Money Rs. 2% or 1/2%	
Tender Fess :500/-			
Earnest Money Cheque Draft No. :		Date :	
Earnest Money M.C.B. Receipt No. :		Date :	
Earnest Fees M.C.B. Receipt No. :		Date :	

"G" Schdule

S. No.	Item Code	Item	Qty.	Unit	Rate	Amount
1.	.10.1.1	Earth work in excavation in foundation, trenches etc. including dressing of sides and ramming of bottoms, including getting out the excavated material, refilling after laying pipe/ foundation and disposal of surplus excavated material at a lead upto 50m suitable site as per direction of Engineer for following depths, below natural ground / Road top level. In all types soils/ saturated soil such as moorum, sand, sandy silt, clay, black cotton soil, kankar, etc. Depth upto 1.5 m.	61.20	Cum	164.00	10036.80
2.	1.2 1.1.2	Carriage of materials by manual labour including loading, unloading and stacking for lead less than 0.5 Km Sand, bazri, ballast, kankar.	61.20	Cum	132.00	8078.40
3.	9.3	Providing and laying lean cement concrete 1:4:8 in Sub- base over aprepared sub-grade with coarse and fine aggregate conforming to IS: 383, the size of coarse aggregate not exceeding 25 mm, aggregate cement ratio not to exceed 15:1, aggregate gradation after blending to be as per table 600-1, Cement content not to be less than 150 kg/ cum, optimum moisture content to be determined during trial length construction, concrete strength not to be less than 10 Mpa at 7 days, mixed in concrete mixer, laid manually, compacted with surface vibrator, finishing and curing complete as per clause 601, 112 of MoRT&H specification including all material, labour, machinery, lighting, guarding and aintenance of diversion.	15.00	Cum	2300.00	34500.00
4.	24.1.1	Brick work with FPS bricks of class designation 75 in foundation and plinth in: Cement mortar 1:4 (1 cement : 4 coarse sand).	29.68	Cum	3950.00	117236.00
5.	14.1.2	Brick masonry work with First class FPS bricks (min. 10.5 Mpa) in cement mortar with mechanical mixer in substructure/ super structure at all levels complete as per clause 1300 and 2200 of MoRT&H specification including all material, labour, scaffolding etc but excluding pointing and plastering. In cement mortar 1:4 (1 cement : 4 coarse sand)	48.88	Cum	4150.00	202852.00
6.	32.3.2	Cement plastering including T&P, scaffolding, material and complete labpour, including cost of water, curing, racking of joints etc. with 20 mm cement plaster of mix : 1:4 (1 cement : 4 fine/ coarse sand)	467.50	Sqm	210.00	98175.00
7.	21.1 21.1.2	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering - All work upto plinth level : 1:1.5:3 (1 Cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size).	20.00	Cum	4700.00	94000.00
8.	.26 29.26.2	Steel work welded in built up sections/ framed work including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works.	1000.00	Kg.	87.50	87500.00
9.	31.1.2	Providing corrugated G.S. sheet roofing including vertical/ curved surface fixed with polymer coated J or	50.00	Sqm	829.00	41450.00

		L hooks, bolts and nuts 8 mm diameter with bitumen and G.I. limpet washers or with G.I. limpet washers filled with white lead and including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete upto any pitch in horizontal/ vertical or curved surfaces) excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required. 0.80mm thick with zinc coating not less than 275gm/m ²				
10.	34.47	Providing and placing on terrace (at all floor levels) polyethylene water storage tank ISI : 12701 marked with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank	1000.00	Per Ltr.	6.50	6500.00
11.	19.1.2	Providing, lowering, laying in trenches, aligning, fixing in position and jointing socketed rubber gasket type ISI marked uPVC pipes of Class III (6 Kg/sqcm) suitable for potable water with rubber ring joints (as per IS 4985-2000) of following outer dia with all accessories (excluding specials) complete including all material, labour, hydraulic testing and commissioning as per Technical Specifications and as per direction of Engineer. 110 mm dia.	20.00	Mtr.	273.00	5460.00
Total						705788.20
Say						7.06 Lacs

I/We Tendering above work @ above/below "G" Schedule.

Signature of Tendering Contractor

**Municipal Corporation, Bikaner.**

Name of Work :- बंगला नगर में कुमावत समाज श्मशान भूमि में विकास कार्य।

Name of Contractor :-

Date of Sales : 20.05.2022 to 30.05.2022		Date of Opening : 31.05.2022	
Tender Cost Rs 830000/-		Earnest Money Rs. 2% or 1/2%	Tender Fess :500/-
Earnest Money Cheque Draft No. :		Date :	
Earnest Money M.C.B. Receipt No. :		Date :	
Earnest Fees M.C.B. Receipt No. :		Date :	

"G" Schdule

S. No.	Item Code	Item	Qty.	Unit	Rate	Amount
1.	2.4.2	Dismantling of existing structures like culverts, bridges, retaining walls, CC road and other structure comprising of masonry, cement concrete, wood work, steel work, including T&P and scaffolding wherever necessary, sorting the dismantled material, disposal of unserviceable material and stacking the serviceable material with all lifts and lead of 50 metres as directed by Engineer.	10.00	Cum	427.00	4270.00
2.	4.2 4.2.1	Earth work in excavation for roadway, including trimming bottom and side slopes in accordance with requirement of line, grades and cross sections, including disposal of surplus material with all lift and lead upto 1000 metre as per MoRT&H specification clause 301. In all type of soil c.	110.00	Cum	145.00	15950.00
3.	1.2 1.1.2	Carriage of materials by manual labour including loading, unloading and stacking for lead less than 0.5 Km Sand, bazri, ballast, kankar.	120.00	Cum	132.00	15840.00
4.	9.3	Providing and laying lean cement concrete 1:4:8 in Sub- base over aprepared sub-grade with coarse and fine aggregate conforming to IS: 383, the size of coarse aggregate not exceeding 25 mm, aggregate cement ratio not to exceed 15:1, aggregate gradation after blending to be as per table 600-1, Cement content not to be less than 150 kg/ cum, optimum moisture content to be determined during trial length construction, concrete strength not to be less than 10 Mpa at 7 days, mixed in concrete mixer, laid manually, compacted with surface vibrator, finishing and curing complete as per clause 601, 112 of MoRT&H specification including all material, labour, machinery, lighting, guarding and aintenance of diversion.	60.00	Cum	2300.00	138000.00
5.	14.1.2	Brick masonry work with First class FPS bricks (min. 10.5 Mpa) in cement mortar with mechanical mixer in substructure/ super structure at all levels complete as per clause 1300 and 2200 of MoRT&H specification including all material, labour, scaffolding etc but excluding pointing and plastering. In cement mortar 1:4 (1 cement : 4 coarse sand)	10.00	Cum	4150.00	41500.00
6.	32.3.2	Cement plastering including T&P, scaffolding, material and complete labpour, including cost of water, curing, racking of joints etc. with 20 mm cement plaster of mix : 1:4 (1 cement : 4 fine/ coarse sand)	100.00	Sqm	210.00	21000.00
7.	31.53.3	Stone slab roofing on ground floor with fine grained stone slab 90mm average thickness from approved quarry including filling of joints slab in cement sand mortar 1:4 with ceiling pointing in cement sand mortar 1 : 3 complete as per specification for span: Above 2.50 metre and up to 3.00 metre	100.00	Sqm	1120.00	112000.00
8.	21.1 21.1.2	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering - All work upto plinth level :	15.00	Cum	4700.00	70500.00

		1:1.5:3 (1 Cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size).				
9.	.26 29.26.2	Steel work welded in built up sections/ framed work including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works.	300.00	Kg.	87.50	26250.00
10.	9.11	Providing and fixing of 60mm thick precast cement concrete interlocking paver block casted with rubber moulds in approved reflective colour and design having minimum compressive strength of 300 kg/ sq cm. The CC paving blocks be laid on average 50mm thick bed of coarse sand and the joint is to be filled with fine sand. Laying procedure on compacted sub-base as defined. Complete job is to be executed as per the instruction of Engineer incharge. The rates to be inclusive of all lead & Lifts etc. complete as per specifications	600.00	Sqm	641.00	384600.00
Total						829910.00
Say						8.30 Lacs

I/We Tendering above work @ above/below "G" Schedule.

Signature of Tendering Contractor



Municipal Corporation , Bikaner.

Name of Work :- राजपूत श्मशान भूमि, बंगलानगर निर्माण एवं विकास कार्य।

Name of Contractor :-

Date of Sales : 20.05.2022 to 30.05.2022		Date of Opening : 31.05.2022	
Tender Cost Rs 1441000/-		Earnest Money Rs. 2% or 1/2%	
		Tender Fess :1000/-	
Earnest Money Cheque Draft No. :		Date :	
Earnest Money M.C.B. Receipt No. :		Date :	
Earnest Fees M.C.B. Receipt No. :		Date :	

"G" Schdule

S. No.	Item Code	Item	Qty.	Unit	Rate	Amount
1.	4.2 4.2.1	Earth work in excavation for roadway, including trimming bottom and side slopes in accordance with requirement of line, grades and cross sections, including disposal of surplus material with all lift and lead upto 1000 metre as per MoRT&H specification clause 301. In all type of soil c.	30.00	Cum	145.00	4350.00
2.	.10.1.1	Earth work in excavation in foundation, trenches etc. including dressing of sides and ramming of bottoms, including getting out the excavated material, refilling after laying pipe/ foundation and disposal of surplus excavated material at a lead upto 50m suitable site as per direction of Engineer for following depths, below natural ground / Road top level. In all types soils/ saturated soil such as moorum, sand, sandy silt, clay, black cotton soil, kankar, etc. Depth upto 1.5 m.	121.50	Cum	164.00	19926.00
3.	1.2 1.1.2	Carriage of materials by manual labour including loading, unloading and stacking for lead less than 0.5 Km Sand, bazri, ballast, kankar.	151.50	Cum	132.00	19998.00
4.	9.3	Providing and laying lean cement concrete 1:4:8 in Sub- base over aprepared sub-grade with coarse and fine aggregate conforming to IS: 383, the size of coarse aggregate not exceeding 25 mm, aggregate cement ratio not to exceed 15:1, aggregate gradation after blending to be as per table 600-1, Cement content not to be less than 150 kg/ cum, optimum moisture content to be determined during trial length construction, concrete strength not to be less than 10 Mpa at 7 days, mixed in concrete mixer, laid manually, compacted with surface vibrator, finishing and curing complete as per clause 601, 112 of MoRT&H specification including all material, labour, machinery, lighting, guarding and aintenance of diversion.	20.25	Cum	2300.00	46575.00
5.	24.1.1	Brick work with FPS bricks of class designation 75 in foundation and plinth in: Cement mortar 1:4 (1 cement : 4 coarse sand).	52.54	Cum	3950.00	207533.00
6.	14.1.2	Brick masonry work with First class FPS bricks (min. 10.5 Mpa) in cement mortar with mechanical mixer in substructure/ super structure at all levels complete as per clause 1300 and 2200 of MoRT&H specification including all material, labour, scaffolding etc but excluding pointing and plastering. In cement mortar 1:4 (1 cement : 4 coarse sand)	115.00	Cum	4150.00	477250.00
7.	32.3.2	Cement plastering including T&P, scaffolding, material and complete labpour, including cost of water, curing, racking of joints etc. with 20 mm cement plaster of mix : 1:4 (1 cement : 4 fine/ coarse sand)	1100.00	Sqm	210.00	231000.00
8.	31.53.3	Stone slab roofing on ground floor with fine grained stone slab 90mm average thickness from approved quarry including filling of joints slab in cement sand mortar 1:4 with ceiling pointing in cement sand mortar 1 : 3 complete as per specification for span: Above 2.50 metre and up to 3.00 metre	150.00	Sqm	1120.00	168000.00
9.	21.1	Providing and laying in position cement concrete	25.00	Cum	4700.00	117500.00

	21.1.2	of specified grade excluding the cost of centring and shuttering - All work upto plinth level : 1:1.5:3 (1 Cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size).				
10.	.26 29.26.2	Steel work welded in built up sections/ framed work including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required. In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works.	1000.00	Kg.	87.50	87500.00
11.	32.33.1	Finishing walls with water proofing cement paint of required shade : New work (Two or more coats applied @ 3.84 kg/10 sqm).	1100.00	Sqm	55.50	61050.00
Total						1440682.00
Say						14.41 Lacs

I/We Tendering above work @ above/below "G" Schedule.

Signature of Tendering Contractor