

बीकानेर नगर निगम

नगर निगम मार्ग, बीकानेर (राजस्थान) फ़ैक्स :- 0151-2226906, फोन :- 0151-2226902, 0151-2226905
E-Mail Address :- nagarnigambikaner@gmail.com, Web Site :- www.bikanermc.org

क्रमांक/निर्माण/2022-23/ 10170-172

दिनांक 25/08/2022

ई- निविदा-सूचना सं0 95/2022-23

नगर निगम बीकानेर की ओर से विभिन्न कार्यो (कुल 01 कार्य) के लिये केन्द्र व राज्य सरकार के अभियांत्रिकी विभागों में "एऐ", "ऐ" श्रेणी में पंजीकृत संवेदको एवं नगर निगम में उपर्युक्त श्रेणी में पंजीकृत निविदादाताओं से निर्धारित प्रपत्र में ई-प्रोक्यूमेंट प्रक्रिया से ऑन लाईन निविदाएं आमंत्रित की जाती है। निविदा से सम्बन्धित विवरण वेब साईट **www.bikanermc.org** Web site **www.SPPP. raj.nic.in** से व **http://eproc.rajasthan.gov.in** पर देखा जा सकता है।
निविदा की अनुमानित लागत :-16.32 लाख

9
आयुक्त

नगर निगम, बीकानेर


दिनांक 25/08/2022

क्रमांक/निर्माण/2022-23/ 10170-172
प्रतिलिपि :-

1. श्रीमान् निदेशक, जनसम्पर्क एवं प्रकाशन विभाग, राजस्थान संवाद जयपुर को प्रेषित कर लेख है कि उपरोक्त निविदा का प्रकाशन कम से कम स्पेस में राज्य सरकार की प्रकाशन नीति के अनुरूप एक मुख्य क्षेत्रीय दैनिक समाचार पत्र, एक मुख्य राज्य स्तरी दैनिक समाचार पत्र बीकानेर संस्करण में प्रकाशन करावें।

9
आयुक्त

नगर निगम, बीकानेर

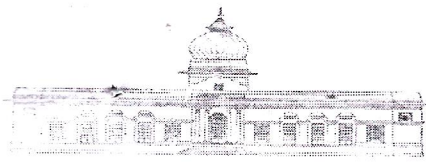

बीकानेर नगर निगम

नगर निगम मार्ग, बीकानेर (राजस्थान) फ़ैक्स :- 0151-2226906, फ़ोन :- 0151-2226902, 0151-2226905
E-Mail Address :- nagarnigambikaner@gmail.com, Web Site :- www.bikanermc.org

क्रमांक/निर्माण/2022-23/10170-172

दिनांक 25/08/22

ई- निविदा-सूचना सं0 95/2022-23

नगर निगम बीकानेर की ओर से निम्नलिखित कार्यों के लिये केन्द्र व राज्य सरकार के अभियांत्रिकी विभागों में "एऐ", "ऐ" श्रेणी में पंजीकृत संवेदको एवं नगर निगम में उपर्युक्त श्रेणी में पंजीकृत निविदादाताओं से निर्धारित प्रपत्र में ई-प्रोक्यूमेंट प्रक्रिया से ऑन लाईन निविदाएं आमंत्रित की जाती है। निविदा से सम्बन्धित विवरण वेबसाईट www.bikanermc.org Website www.SPPP.raj.nic.in से व <http://eproc.rajasthan.gov.in> पर देखा जा सकता है।

निविदा कार्य :	1	श्रीराम रामावत स्वर्ग आश्रम में जर्जर भवन को हटाकर नया बेसमेंट, बेसमेंट के उपर स्नानघर तथा बरामदा निर्माण कार्य व दीवार की ऊँचाई करने का कार्य व टंकी का कार्य। 16.32 लाख
निविदा की अनुमानित लागत	:	16.32 लाख
ऑनलाईन निविदा फार्म मिलने की तिथि	:	30/08/22 09.30 बजे से 08/09/22 18:00 बजे तक
ऑनलाईन निविदा फार्म जमा कराने की तारीख	:	30/08/22 09.30 बजे से 08/09/22 18:00 बजे तक
ऑनलाईन निविदा खोलने की तिथि	:	09/09/2022 को 17.00 बजे

इच्छुक संवेदको को अपने डिजिटल हस्ताक्षर के माध्यम से वेब साईट <http://eproc.rajasthan.gov.in> पर रजिस्टर्ड होना आवश्यक है।

क्रमांक/निर्माण/2022-23/10170-172

प्रतिलिपि :-

1. श्रीमान् महापौर महोदया, नगर निगम, बीकानेर।
2. सुरक्षित पत्रावली।


आयुक्त
नगर निगम, बीकानेर
दिनांक 25/08/2022

आयुक्त
नगर निगम, बीकानेर

ई- निविदा-सूचना सं0 95/2022-23

निविदा कार्य :	1	श्रीराम रामावत स्वर्ग आश्रम में जर्जर भवन को हटाकर नया बेसमेंट, बेसमेंट के उपर स्नानघर तथा बरामदा निर्माण कार्य व दीवार की ऊँचाई करने का कार्य व टंकी का कार्य। 16.32 लाख
निविदा की अनुमानित लागत	:	16.32 लाख
ऑनलाइन निविदा फार्म मिलने की तिथि	:	<u>30/08/22</u> 09.30 बजे से <u>08/09/22</u> 18:00 बजे तक
ऑनलाइन निविदा फार्म जमा कराने की तारीख	:	<u>30/08/22</u> 09.30 बजे से <u>08/09/22</u> 18:00 बजे तक
ऑनलाइन निविदा खोलने की तिथि	:	<u>09/09/22</u> को 17.00 बजे


 आयुक्त
 नगर निगम, बीकानेर

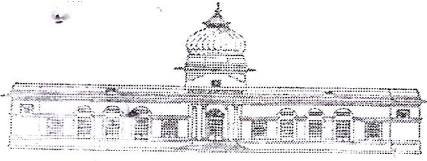

(वेबसाइट पर अपलोड हेतु)

बीकानेर नगर निगम

नगर निगम मार्ग, बीकानेर (राजस्थान) फ़ैक्स :- 0151-2226906, फ़ोन :- 0151-2226902, 0151-2226905

E-Mail Address :- nagarnigambikaner@gmail.com, Web Site :- www.bikanermc.org

क्रमांक / निर्माण / 2022-23 / 1070-17

दिनांक 25/08/2022

ई- निविदा-सूचना सं0 95 / 2022-23

नगर निगम बीकानेर की ओर से निम्नलिखित कार्यों के लिये केन्द्र व राज्य सरकार के अभियांत्रिकी विभागों में "ऐऐ", "ऐ" श्रेणी में पंजीकृत संवेदको एवं नगर निगम में उपर्युक्त श्रेणी में पंजीकृत निविदादाताओं से निर्धारित प्रपत्र में ई-प्रोक्यूमेंट प्रक्रिया से ऑन लाइन निविदाएं आमंत्रित की जाती है। निविदा से सम्बन्धित विवरण वेबसाइट www.bikanermc.org Website www.SPPP.raj.nic.in से व <http://eproc.rajasthan.gov.in> पर देखा जा सकता है।

जिला	कार्य/पैकेज का नाम	अनुमानित लागत (लाखों में)	कार्य की अवधि
बीकानेर	श्रीराम रामावत स्वर्ग आश्रम में जर्जर भवन को हटाकर नया बेसमेंट, बेसमेंट के उपर स्नानघर तथा बरामदा निर्माण कार्य व दीवार की ऊँचाई करने का कार्य व टंकी का कार्य।	16.32	3 माह

निविदा प्रपत्रों को वेब साइट <http://eproc.rajasthan.gov.in> से डाउनलोड किया जा सकता है। इन निविदाओं में भाग लेने वाले संवेदक निविदा को इलेक्ट्रॉनिक फारमेट में वेबसाइट <http://eproc.rajasthan.gov.in> पर अपलोड करावें।

नोट :- स्थानीय निकाय विभाग जयपुर के अन्तर्गत उपर्युक्त श्रेणी में रजिस्टर्ड फर्म एवं नगर निगम बीकानेर संभाग में रजिस्टर्ड "डी" क्लास फर्म 15.00 लाख तक के कार्य एवं "सी" क्लास फर्म 50.00 लाख तक के कार्य एवं "बी" क्लास फर्म 1/2 प्रतिशत धरोहर राशि जमा करवाने पर एवं अन्य विभागों के "ऐऐ" अथवा "ऐ" श्रेणी के संवेदक 2 प्रतिशत धरोहर राशि जमा करवाकर निविदा में भाग ले सकते हैं।

9
आयुक्त
नगर निगम, बीकानेर

निविदा शर्तें

1. स्थानीय निकाय विभाग जयपुर के अन्तर्गत उपर्युक्त श्रेणी में रजिस्टर्ड फर्म एवं नगर निगम बीकानेर संभाग में रजिस्टर्ड "डी" क्लास फर्म 15.00 लाख तक के कार्य एवं "सी" क्लास फर्म 50.00 लाख तक के कार्य एवं "बी" क्लास फर्म 1/2 प्रतिशत धरोहर राशि जमा करवाने पर एवं अन्य विभागों के "एए" अथवा "ए" श्रेणी के संवेदक 2 प्रतिशत धरोहर राशि जमा करवाकर निविदा में भाग ले सकते हैं।
2. निविदा प्रपत्रों हेतु डाउनलोड की अवधि 30/08/22 09.30 बजे से 08/09/22 18:00 बजे तक होगी।
3. (अ) निविदा प्रपत्र फॉरमेट में वेबसाइट <http://eproc.rajasthan.gov.in> पर 30/08/22 09.30 बजे से 08/09/22 18:00 बजे तक जमा करवाये जा सकते हैं एवं प्राप्त निविदाएं, इलैक्ट्रॉनिक फॉरमेट में वेबसाइट <http://eproc.rajasthan.gov.in> पर अधिशाषी अभियंता, नगर निगम, बीकानेर निर्माण अनुभाग में 09/09/22 को 17:00 बजे बाद खोली जावेगी।
4. यदि किसी कारणवश उस दिन अवकाश रहता है तो अगले दिन उसी समय व उसी स्थान पर निविदाएं खोली जायेगी।
(अ) निविदा प्रक्रिया ऑन लाईन होगी।
(ब) इलैक्ट्रॉनिक निविदा प्रक्रिया में प्रीबीड मीटिंग का प्रावधान नहीं है।
5. अधिशाषी अभियंता, नगर निगम, बीकानेर निर्माण अनुभाग कार्यालय में संवेदक द्वारा 30/08/22 09.30 बजे से 08/09/22 18:00 बजे तक किसी भी कार्य दिवस में निविदा प्रपत्र को देखा जा सकता है। निविदा प्रपत्रों में निविदाकर्ता के लिये योग्यता सूचना तथा निविदाकर्ता की पात्रता, प्लान, स्पेसिफिकेशन, ड्राईंग विभिन्न कार्यों की मात्रा एवं दरों का विवरण, नियम, शर्तें एवं अन्य विवरण वर्णित है।
6. निविदा खोलने की दिनांक से 90 दिवस तक निविदा स्वीकृति हेतु मान्य रहेगी। यदि निविदाकर्ता उस अवधि में अपनी निविदा अथवा शर्तों में किसी प्रकार का संशोधन करता है अथवा अपनी निविदा वापस ले लेता है तो उसकी धरोहर राशि जब्त कर ली जावेगी।
7. किसी भी निविदा को स्वीकार करने एवं बिना कारण बताये निरस्त करने के समस्त अधिकार सक्षम अधिकारी के पास सुरक्षित है आरपीडब्ल्यू ए-100 की समस्त शर्तें मान्य होगी।
8. 10 लाख या अधिक लागत के कार्यों की Defect Liability Period 05 वर्ष का होगा।
9. RTPP एक्ट 2012, नियम 2013 के समस्त प्रावधान लागू होंगे। RTPP 2013 के नियम 75A के अनुसार कार्य में दर 15 प्रतिशत से अधिक नीची आने पर बिड की 85 प्रतिशत राशि में से भरी गई बिड के अन्तर राशि का 50 प्रतिशत की राशि अतिरिक्त पी0जी0 के रूप में अनुबंध से पूर्व जमा कराना आवश्यक होगा।
10. निविदा शुल्क निम्नानुसार निर्धारित है :-

कार्य की अनुमानित राशि (लाखों में)	शुल्क
नाम	आयुक्त, नगर निगम, बीकानेर।
10 लाख तक	500 / -
10 लाख से अधिक	1000 / -

11. प्रासेसिंग फीस निम्नानुसार निर्धारित है :-


कार्य की अनुमानित राशि (लाखों में)	शुल्क
नाम	Managing Director, RISL, Jaipur
50 लाख तक	500 / -
50 लाख से अधिक	1000 / -

12. निविदा शुल्क, प्रासेसिंग फीस एवं धरोहर राशि के भुगतान की प्रक्रिया ऑनलाईन ही होगी।
13. निविदा हेतु ऑनलाईन भुगतान नगर निगम की वेबसाइट www.bikanermc.org पर PAY ONLINE ऑप्शन पर होगा।

14. ऑनलाईन भुगतान हेतु संवेदक को नगर निगम की वेबसाइट www.bikanermc.org पर **PAY ONLINE** पर भुगतान किये जाने के पश्चात् भुगतान रसीद, फर्म के रजिस्ट्रेशन की प्रति एवं फर्म का जी0एस0टी0 प्रमाण पत्र को ऑनलाईन साईट <http://eproc.rajasthan.gov.in> पर अपलोड करना अनिवार्य होगा।
15. निविदादाता द्वारा निविदा दस्तावेज मय कार्य का "G" Schdule की प्रति को हस्ताक्षर मय नाम, तकनीकी निविदा के साथ अपलोड किया जाना अनिवार्य है अन्यथा हस्ताक्षरित निविदा दस्तावेज के अभाव में निविदा पर विचार नहीं किया जावेगा।
16. ऑनलाईन पेमेंट भुगतान के अतिरिक्त किसी अन्य तरीके के भुगतान करने वाली निविदा पर विचार नहीं किया जावेगा।
17. निविदा शुल्क, प्रोसेसिंग शुल्क Non Refundable होगा।
18. निर्धारित शुल्क से कम भुगतान करने वाली निविदा पर विचार नहीं किया जावेगा।
19. किसी टंकणीय त्रुटि के कारण कार्ड के जी अनुसूची की विभिन्न इकाई की दरे सम्बंधित एस0ओ0आर0/बी0एस0आर0 की दरें मानी जावेगी।
20. निविदा प्रपत्र 02 कवर में होगा। यदि संवेदक द्वारा निविदा प्रपत्र अनुसार निविदा अपलोड करते समय वांछित प्रपत्र संलग्न नहीं किये जाते हैं तो उस निविदा पर विचार नहीं किया जावेगा।
21. निविदादाता को श्रम नियमों का पालन करना होगा। श्रमिकों के बीमा (इश्योरेन्स) एवं पी0एफ0 जमा आदि करवाने की जिम्मेवारी सफल निविदादाता की होगी। ई0पी0एफ0 एवं ईएसआई जमा राशि के चालान श्रमिकों के नाम सहित प्रस्तुत करने पर ही रनिंग व अंतिम बिल का भुगतान किया जावेगा।
22. ई- टेन्डरिंग के लिये निविदादाता हेतु निर्देश :-
 अ - इन निविदाओं में इच्छुक निविदादाता निविदा प्रपत्रों का इन्टरनेट साईट <http://eproc.rajasthan.gov.in> से डाउनलोड कर सकते हैं।
 ब - निविदाओं में भाग लेने वाले निविदादाताओं को इन्टरनेट साईट <http://eproc.rajasthan.gov.in> पर रजिस्टर करवाना होगा। ऑनलाईन निविदा में भाग लेने के लिये डिजिटल सर्टिफिकेट टेक्नोलॉजी एक्ट 2000 के तहत प्राप्त करना होगा जो इलेक्ट्रॉनिक निविदा में साईन करने हेतु काम आयेगा। निविदादाता उपरोक्त डिजिटल सर्टिफिकेट सी सी ए द्वारा स्वीकृत ऐजेन्सी से प्राप्त कर सकते हैं। जिन निविदादाताओं के पास पूर्व में वैध डिजिटल सर्टिफिकेट है, नया डिजिटल सर्टिफिकेट लेने की आवश्यकता नहीं है।
 स- निविदादाताओं को निविदा प्रपत्र इलेक्ट्रॉनिक फॉर्मेट में उपरोक्त वेबसाईट पर डिजिटल साईन के साथ प्रस्तुत करना होगा। जिसके प्रस्ताव डिजिटल साईन के साथ नहीं होंगे, उनके प्रस्ताव स्वीकार नहीं किये जायेंगे। कोई भी प्रस्ताव अकेले भौतिक फर्म में स्वीकार्य नहीं होगा।
 द- ऑन लाईन निविदाएं निर्धारित दिनांक एवं समय पर उपरोक्त क्रम संख्या - 3 के अनुसार खोली जायेगी।
 य - इलेक्ट्रॉनिक निविदा प्रपत्रों को जमा कराने से पूर्व निविदादाता यह सुनिश्चित कर लेवे कि निविदा प्रपत्रों से संबंधित सभी आवश्यक दस्तावेजों की स्कैन कॉपी निविदा प्रपत्रों के साथ अटैच कर दी गयी है।
 र - कोई भी टेंडर इलेक्ट्रॉनिक जमा कराने में किसी कारण विलम्ब हो जाता है तो उसका जिम्मेदार विभाग नहीं होगा।
 ल - टेंडर के प्रपत्रों में आवश्यक सभी सूचियों को सम्पूर्ण रूप से भरकर ऑनलाईन दर्ज करें।


आयुक्त

नगर निगम, बीकानेर

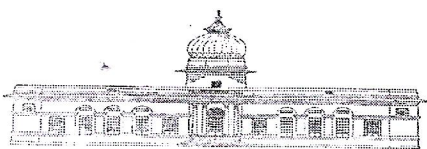

NIT No. 95/22-23 Work No. 01

Municipal Corporation, Bikaner.

Name of Work :- श्रीराम रामावत स्वर्ग आश्रम में जर्जर भवन को हटाकर नया बेसमेंट, बेसमेंट के उपर स्नानघर तथा बरामदा निर्माण कार्य व दीवार की ऊँचाई करने का कार्य व टंकी का कार्य।

Name of Contractor :-

Date of Sales : As per NIT	Date of Opening : As per NIT
Tender Cost Rs 1632000/-	Earnest Money Rs. 2% or 1/2%
Earnest Money Cheque Draft No. :	Tender Fess :1000/-
Earnest Money M.C.B. Receipt No. :	Date :
Earnest Fees M.C.B. Receipt No. :	Date :

"G" Schdule

S. No.	Item Code	Item Tank	Qty.	Unit	Rate	Amount
1.	10.1.1	Earth work in excavation in foundation, trenches etc. including dressing of sides and ramming of bottoms, including getting out the excavated material, refilling after laying pipe/ foundation and disposal of surplus excavated material at a lead upto 50m suitable site as per direction of Engineer for following depths, below natural ground / Road top level. In all types soils/ saturated soil such as moorum, sand, sandy silt, clay, black cotton soil, kankar, etc. Depth upto 1.5 m.	13.02	Cum	164.00	2135.28
2.	4.10.1.2	Add extra for over all depth of excavation above 1.5 m and upto 3.0 m over item no 4.10.1.1	2.46	Cum	11.50	28.29
3.	21.1.8	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering - All work upto plinth level : 1:5:10 (1 Cement : 5 fine/ coarse sand : 10 graded stone aggregate 40 mm nominal size)	1.05	Cum	3120.00	3276.00
4.	21.1 21.1.2	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering - All work upto plinth level : 1:1.5:3 (1 Cement : 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size).	1.05	Cum	4700.00	4935.00
5.	24.1.1	Brick work with FPS bricks of class designation 75 in foundation and plinth in: Cement mortar 1:4 (1 cement : 4 coarse sand).	9.30	Cum	3950.00	36735.00
6.	32.3.2	Cement plastering including T&P, scaffolding, material and complete labpour, including cost of water, curing, racking of joints etc. with 20 mm cement plaster of mix : 1:4 (1 cement : 4 fine/ coarse sand)	28.96	Sqm	210.00	6081.60
7.	32.9	Neat cement punning	28.96	Sqm	37.00	1071.52
8.	30.3.1	Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded 20mm nominal size stone aggregate) finished with a floating coat of neat cement including cement slurry, but excluding the cost of nosing of steps etc. complete. 40mm thick	15.99	Sqm	292.00	4669.08
9.	31.53.1	Stone slab roofing on ground floor with fine grained stone slab 90mm average thickness from approved quarry including filling of joints slab in cement sand mortar 1:4 with ceiling pointing in cement sand mortar 1 : 3 complete as per specification for span: Up to 2.00 metre.	9.99	Sqm	985.00	9840.15
10.	31.41.2	Providing and fixing on wall face Unplasticised Rigid PVC Single socketed pipes rain water pipes conforming to IS : 13592 Type A including jointing with seal ring conforming to IS : 5382 leaving 10 mm gap for thermal expansion. 110 mm diameter	12.00	Mtr.	253.00	3036.00
Part "B"						
11.	SOR 2017 3.1.1	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of	75.31	Cum	284.00	21388.04

		unserviceable material within 50 metres lead as per direction of Engineer-incharge. In cement Mortar				
12.	3.2.2	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead. For thickness of tiles above 25 mm and upto 40 mm	67.20	Sqm	45.00	3024.00
13.	3.6	Dismantling stone slab flooring laid in cement mortar including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.	102.37	Sqm	102.00	10441.74
14.	3.3.1	Dismantling doors, windows and clerestory windows (steel or wood) shutter including chowkhats, architrave, holdfasts etc. complete and stacking within 50 metres lead : Of area 3 sq. metres and below	16.80	Each	151.00	2536.80
15.	2.4.2	Dismantling of existing structures like culverts, bridges, retaining walls, CC road and other structure comprising of masonry, cement concrete, wood work, steel work, including T&P and scaffolding wherever necessary, sorting the dismantled material, disposal of unserviceable material and stacking the serviceable material with all lifts and lead of 50 metres as directed by Engineer.	7.43	Cum	427.00	3172.61
Part "C"						
16.	10.1.1	Earth work in excavation in foundation, trenches etc. including dressing of sides and ramming of bottoms, including getting out the excavated material, refilling after laying pipe/ foundation and disposal of surplus excavated material at a lead upto 50m suitable site as per direction of Engineer for following depths, below natural ground / Road top level. In all types soils/ saturated soil such as moorum, sand, sandy silt, clay, black cotton soil, kankar, etc. Depth upto 1.5 m.	66.52	Cum	164.00	10909.28
17.	21.1.8	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering - All work upto plinth level : 1:5:10 (1 Cement : 5 fine/ coarse sand : 10 graded stone aggregate 40 mm nominal size)	14.38	Cum	3120.00	44865.60
18.	24.1.1	Brick work with FPS bricks of class designation 75 in foundation and plinth in: Cement mortar 1:4 (1 cement : 4 coarse sand).	103.46	Cum	3950.00	408667.00
19.	23.1.2	Providing and laying in position specified grade of reinforced cement concrete excluding the cost of centring, shuttering, finishing and reinforcement - All work upto plinth level : 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size)	4.95	Cum	4960.00	24552.00
20.	22.1.1	Centring and shuttering with plywood or steel sheet upto two stories or height upto 7.5 metre above plinth level including strutting, propping etc. and removal of form for : Foundations, footings, bases of columns, etc. for mass concrete.	22.07	Sqm	162.00	3575.34
21.	23.19 23.19.6	Reinforcement for R.C.C. work at all levels including straightening, cutting, bending, placing in position and binding all complete. Thermo-Mechanically Treated bars.	3150.00	Kg.	51.50	162225.00
22.	24.5.1	Brick work with FPS bricks of class designation 75 in superstructure above plinth level upto two stories in all shapes and sizes in : Cement mortar 1:4 (1 cement : 4 coarse sand)	53.52	Cum	4500.00	240840.00
23.	23.3 23.3.2	Reinforced cement concrete work in beams, suspended floors, roofs having slope upto 15° landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases upto two stories excluding the cost of centring, shuttering, finishing and reinforcement: M-20 Grade Concrete (1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20 mm nominal size) -As per design mix).	18.85	Cum	5530.00	104240.50
24.	22.1.5	Centring and shuttering with plywood or steel sheet upto two stories or height upto 7.5 metre above plinth level including strutting, propping etc. and removal of form for Lintels, beams, plinth beams, girders, bressumers and cantilevers.	31.28	Sqm	269.00	8414.32
25.	26.6.1	Providing and fixing sloping chajja of stone 40 mm thick and upto 80 cm wide beyond the wall as measured along the slope in cement mortar 1:4 (1 cement : 4 coarse sand) with 12mm diameter anchoring steel bar 45 cm long fixed in each stone and supported	12.30	Sqm	1400.00	17220.00

		on and including with bricks cove of class designation 75 in cement mortar 1:4 (1 cement : 4 coarse sand) including pointing in cement mortar 1:2 (1 white cement : 2 stone dust) with an admixture of pigment matching the stone shade: Red sand stone: With bricks				
26.	31.53.3	Stone slab roofing on ground floor with fine grained stone slab 90mm average thickness from approved quarry including filling of joints slab in cement sand mortar 1:4 with ceiling pointing in cement sand mortar 1 : 3 complete as per specification for span: Above 2.50 metre and up to 3.00 metre	39.13	Sqm	1120.00	43825.60
27.	32.3.2	Cement plastering including T&P, scaffolding, material and complete labpour, including cost of water, curing, racking of joints etc. with 20 mm cement plaster of mix : 1:4 (1 cement : 4 fine/ coarse sand)	469.56	Sqm	210.00	98607.60
28.	30.34	Random rubble dry stone Kharanja (soling) under floor.	8.34	Cum	1360.00	11342.40
29.	21.1.3	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering - All work upto plinth level : 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	2.78	Cum	4280.00	11898.40
30.	30.24.1	Kota stone slab flooring 25mm thick over 20 mm (average) thick base laid over and jointed with grey cement slurry mixed with pigment to match the shade of the slab including rubbing and polishing complete with base of cement mortar 1 : 4 (1 cement : 4 coarse sand) : Area of each slab 900 to 2000 sqcm	83.47	Sqm	1020.00	85139.40
31.	22.1.3	Centring and shuttering with plywood or steel sheet upto two stories or height upto 7.5 metre above plinth level including strutting, propping etc. and removal of form for : Suspended floors, roofs, landings, balconies and access platform.	72.07	Sqm	287.00	20684.09
32.	30.16.4	Precast terrazzo tiles 22mm thick with graded marble chips of size upto 12mm laid in floors, and landings, jointed with neat cement slurry mixed with pigment to match the shade of the tiles including rubbing and polishing complete with precast tiles on 20mm thick bed of cement mortar 1:4 (1 cement :4 coarse sand) : Ordinary cement without any pigment.	72.07	Sqm	642.00	46268.94
33.	27.11	Providing and fixing 1st quality standard white, grey, ivory, fume red brown, light green, light blue and other light shades glazed tiles confirming to IS : 13753 & IS :15622 of size 200mm x 300mm inwalls, floors, steps, pillars etc. laid on a bed of neat cement slurry finished with flush pointing in the white cement mixed with pigment to match the shade of the tile complete (excluding the cost of cement plaster on walls and pillar).	54.39	Sqm	679.00	36930.81
34.	31.41.2	Providing and fixing on wall face Unplasticised Rigid PVC Single socketed pipes rain water pipes conforming to IS : 13592 Type A including jointing with seal ring conforming to IS : 5382 leaving 10 mm gap for thermal expansion. 110 mm diameter	24.00	Mtr.	253.00	6072.00
35.	34.50.1	Providing and fixing C.P. brass long body bib cock of approved quality conforming to IS standards and weighing not less than 690 gms. 15 mm nominal bore	08.00	Each	394.00	3152.00
36.	34.2.1	Providing and fixing Polyethelene-Aluminium-Polyethelene (PE-ALPE) Composite Pressure Pipes conforming to IS - 15450 U.V. stabilised with carbon black having thermal stability for hot & cold water supply, capable to withstand temperature up to 80 C including all special fittings of composite material (engineering plastic blend and brass inserts wherever required) e.g. elbows ,tees ,reducers, couplers & connectors etc. with clamps at 1.00 metre spacing. This includes the costs of cutting chases and including testing of joints complete as per direction of the engineer in charge. 1216 (16 mm OD) pipe	50.00	Mtr.	297.00	14850.00
37.	34.2.2	1620 (20 mm OD) pipe	50.00	Mtr.	331.00	16550.00
38.	41.1.1	Wiring of light point / fan point / exhaust fan point / call bell point with 1.5 sq. mm FR PVC insulated	04.00	Per Point	230.00	920.00

		unsheathed 1.1kV grade flexible copper conductor and 1.5 sq.mm FR PVC insulated copper earth conductor (IS:694) of approved make in double lock/ ISI marked single lock pvc casing capping & it's accessories, 18 SWG M.S. box with earth terminal, screwless cage connectors for neutral looping in switch board & false ceiling point, 6 A switch 3.0 mm thick phenolic laminated sheet, zinc plated / brass screws, cup washers , making connections, testing etc. as required. Short point (up to 3 mtr.)				
39.	41.1.2	Medium point (up to 6 mtr.)	04.00	Per Point	322.00	1288.00
40.	41.1.3	Long point (up to 10 mtr..)	02.00	Per Point	487.00	974.00
41.	29.15.1	Providing and fixing pressed steel door frames confirming to IS: 4351 manufactured from commercial mild steel sheet of 1.25 mm thickness including hinges jamb, lock jamb, bead and if required angle threshold of mild steel angle of section 50x25mm, or base ties of 1.25mm pressed mild steel welded or rigidly fixed together by mechanical means, adjustable lugs with split end tail to each jamb including steel butt hinges 2.5mm thick with mortar guards, lock strike-plate and shock absorbers as specified and applying a coat of approved steel primer after pre-treatment of the surface as directed by Engineer-in-charge: Profile B	15.60	Mtr.	396.00	6177.60
42.	1251	Ready made steel door with necessary hinges, lugs and glazing clips excluding other fittings & their fixing	6.30	Sqm	1850.00	11655.00
Part "D"						
43.	24.5.1	Brick work with FPS bricks of class designation 75 in superstructure above plinth level upto two stories in all shapes and sizes in : Cement mortar 1:4 (1 cement : 4 coarse sand)	13.80	Cum	4500.00	62100.00
44.	32.3.2	Cement plastering including T&P, scaffolding, material and complete labpour, including cost of water, curing, racking of joints etc. with 20 mm cement plaster of mix : 1:4 (1 cement : 4 fine/ coarse sand)	75.00	Sqm	210.00	15750.00
total						1632065.99
Say						16.32 Lacs

I/We Tendering above work @ above/below "G" Schedule.

Signature of Tendering Contractor